

PRIOR ART

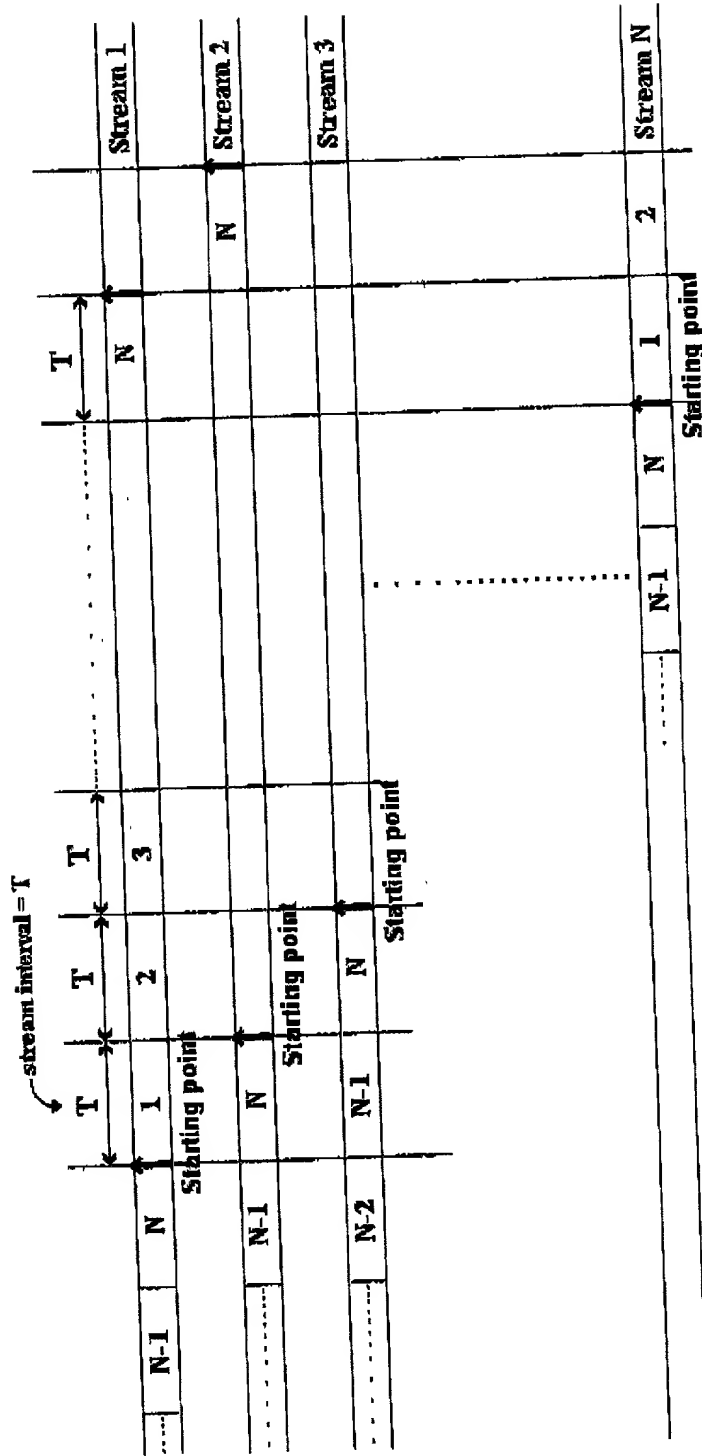


Figure 1

FOI b6 b7C b7D

PRIOR ART

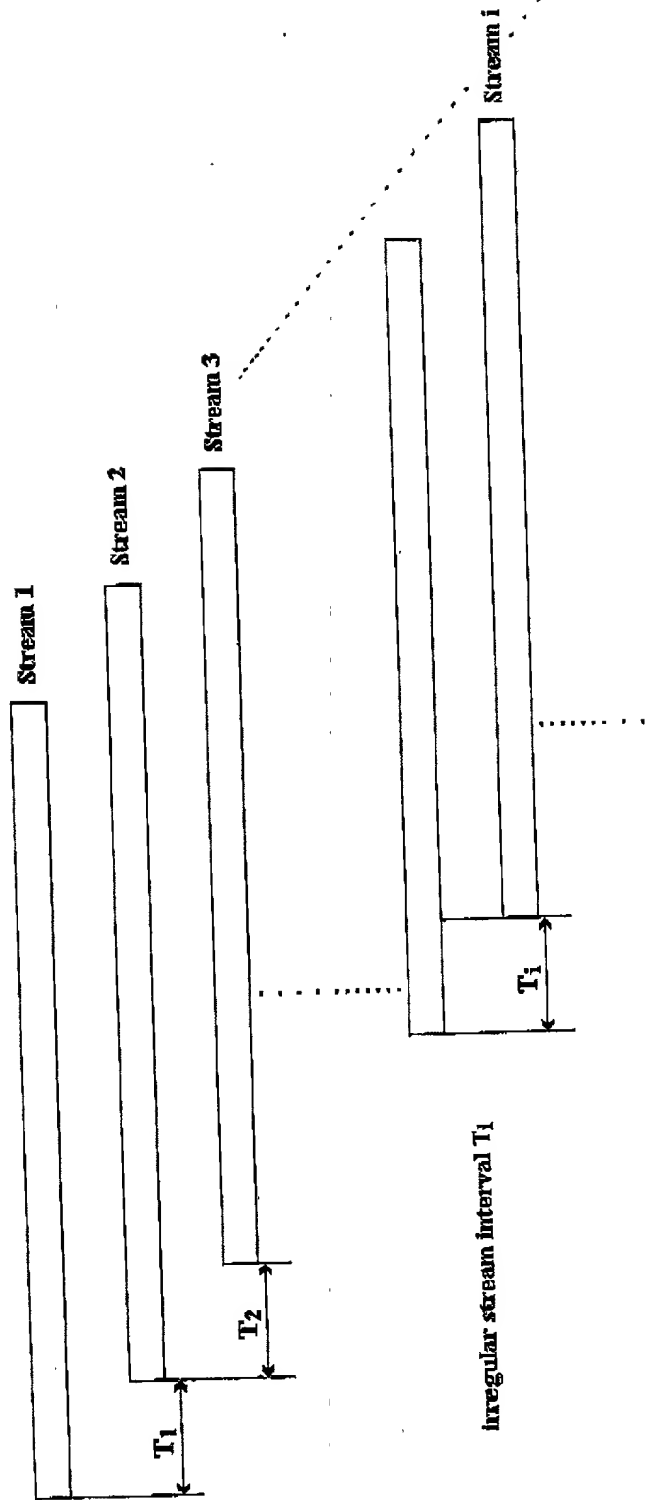


Figure 2

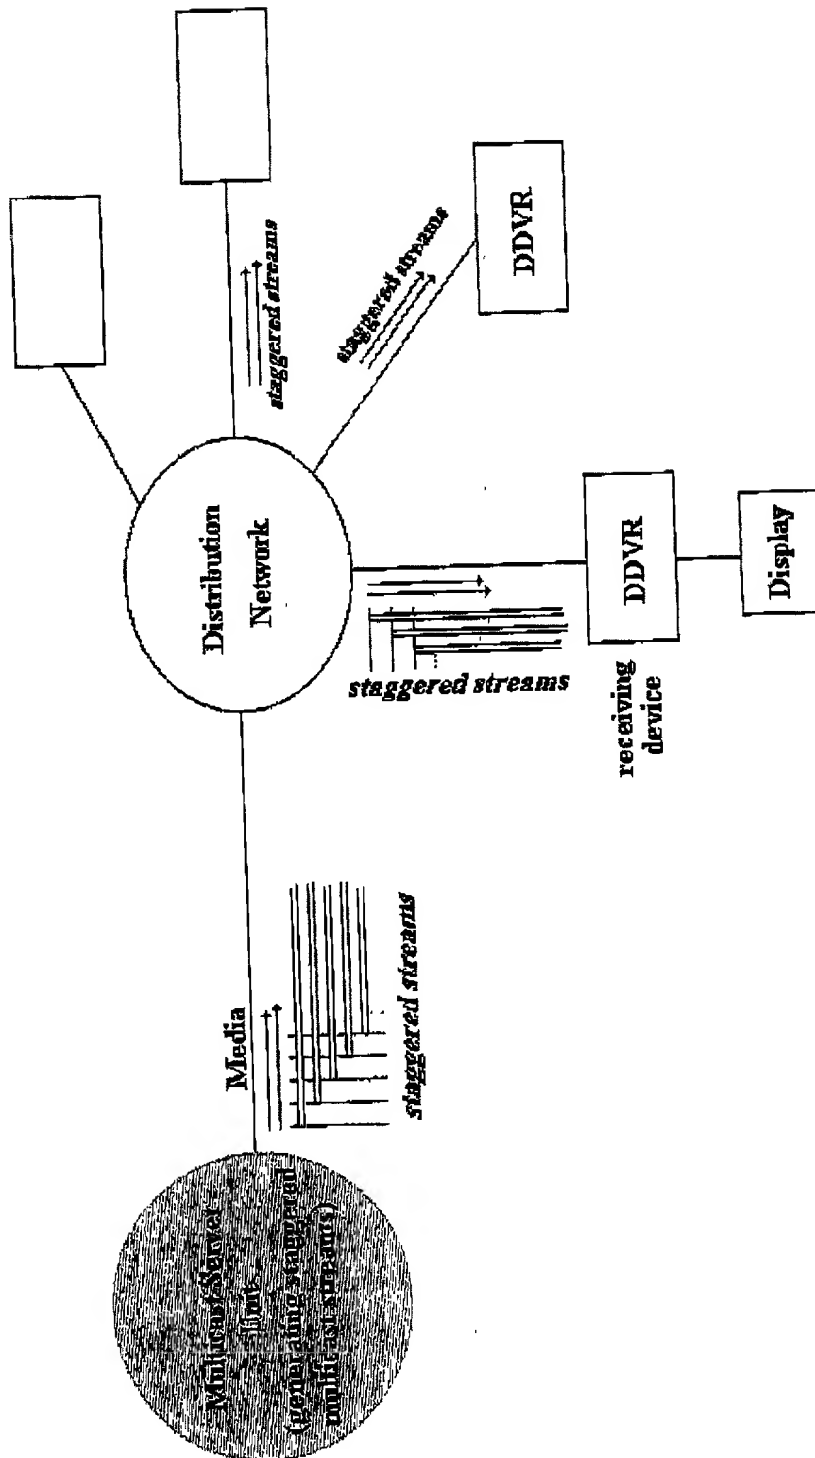


Figure 3

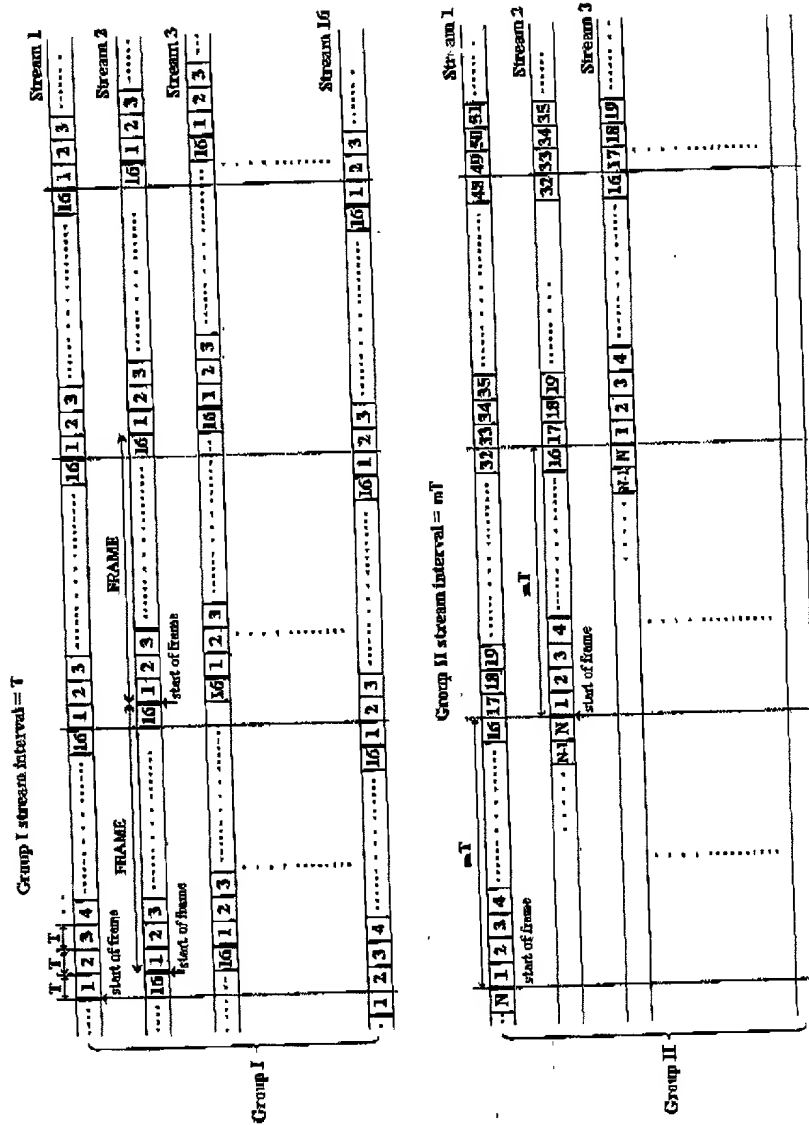


Figure 4

Figure 1 consists of 12 histograms, labeled (a) through (l), arranged in a single column. Each histogram shows the frequency of the number of non-zero elements in the vector of the first 1000 iterations of the algorithm. The x-axis for all histograms is 'Number of non-zero elements' with major ticks at 0, 250, 500, 750, and 1000. The y-axis is 'Frequency' with major ticks at 0, 20, 40, 60, 80, and 100. The distributions are roughly bell-shaped and centered around 500-600 non-zero elements. The histograms are labeled (a) through (l) from top to bottom.

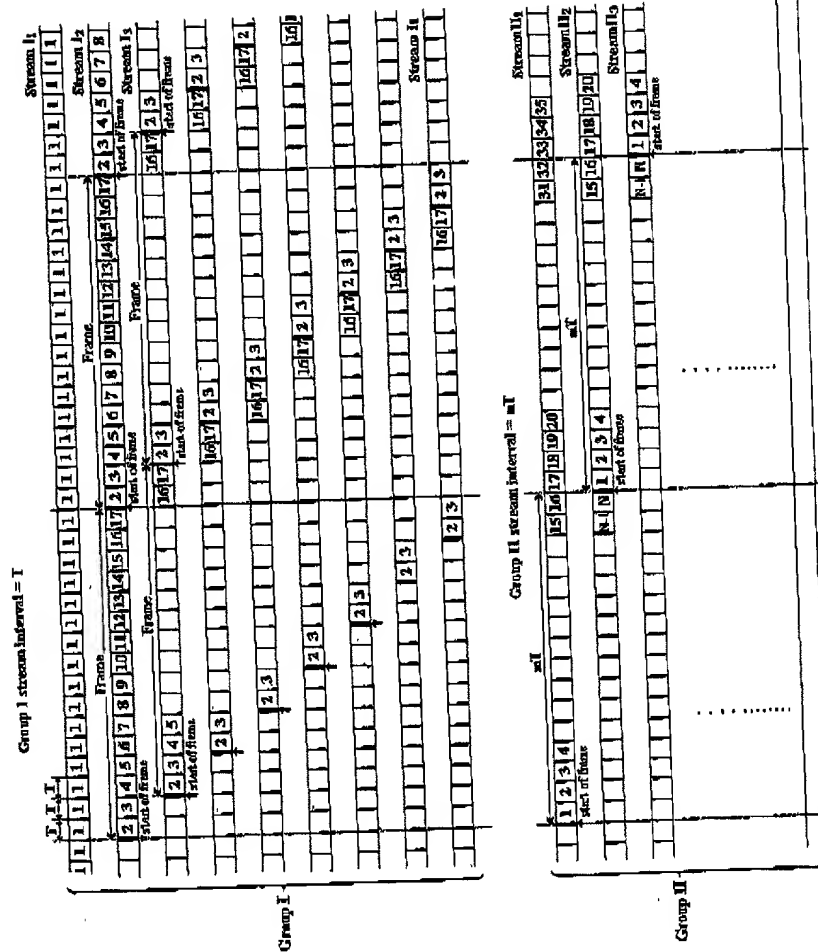


Figure 5

101620 54947660

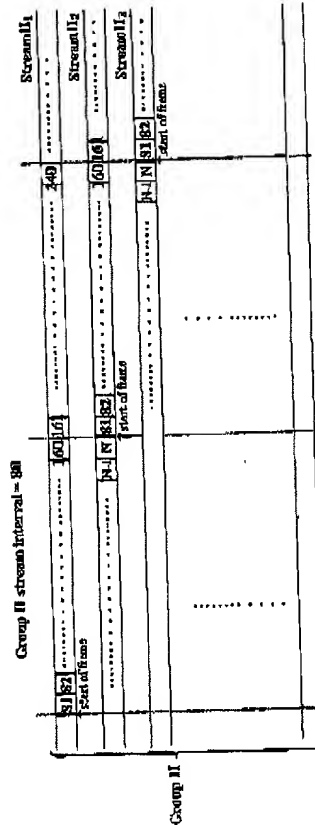
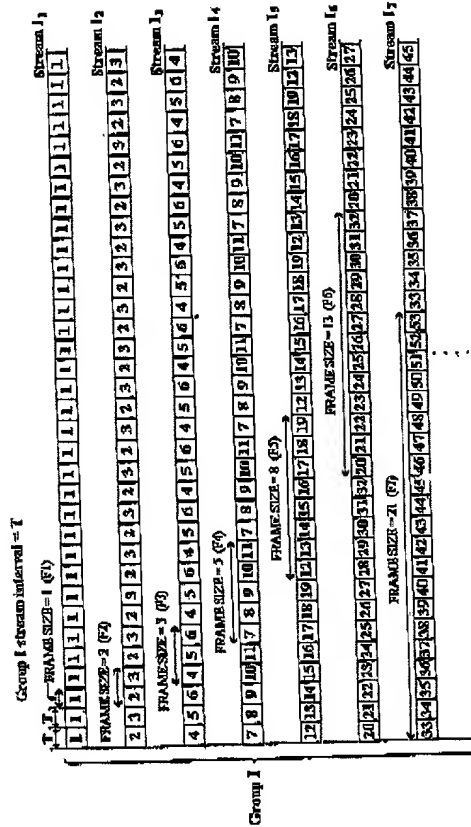


Figure 6

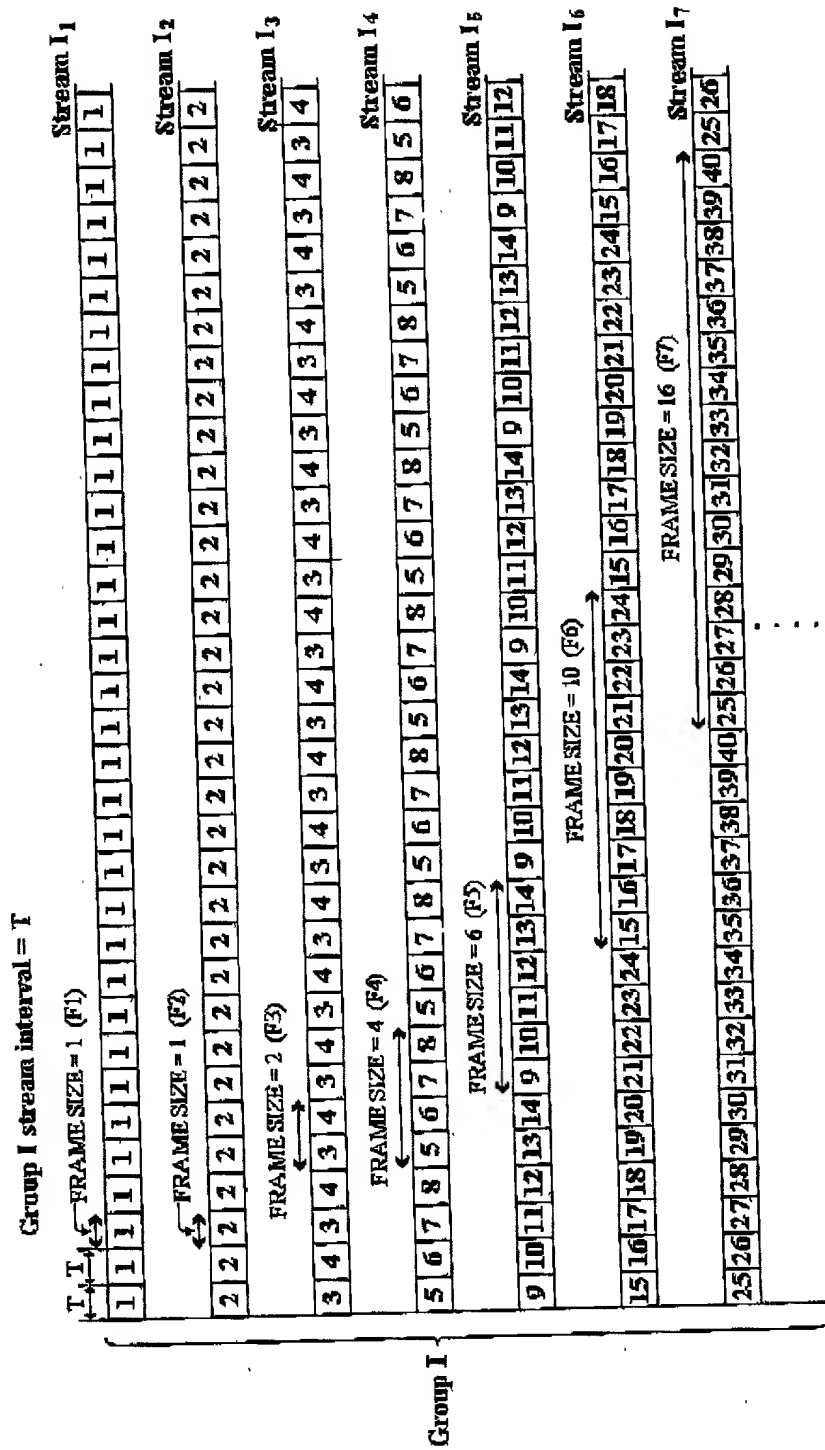


Figure 7

[illegible][illegible]

Figure 8

[illegible][illegible]

Figure 9

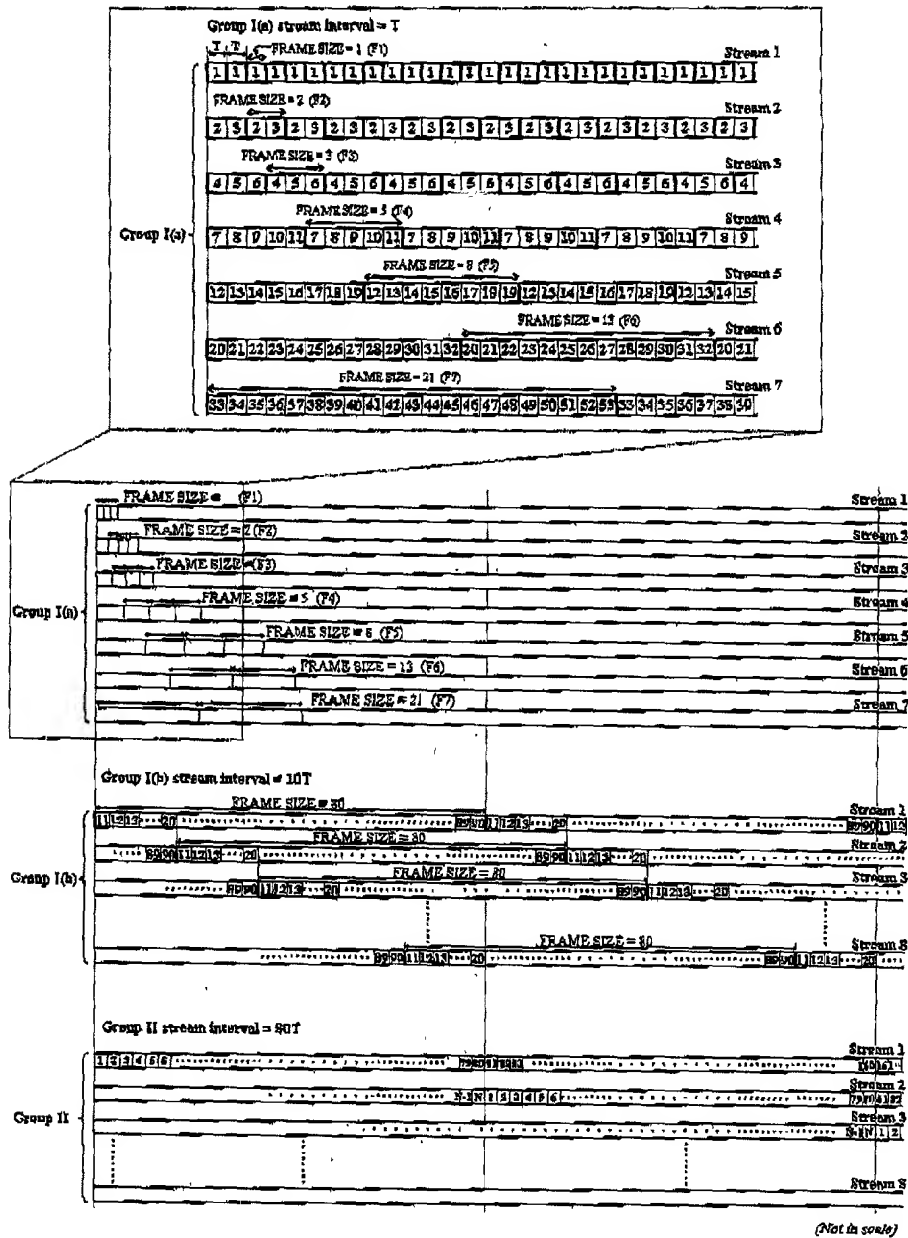


Figure 10

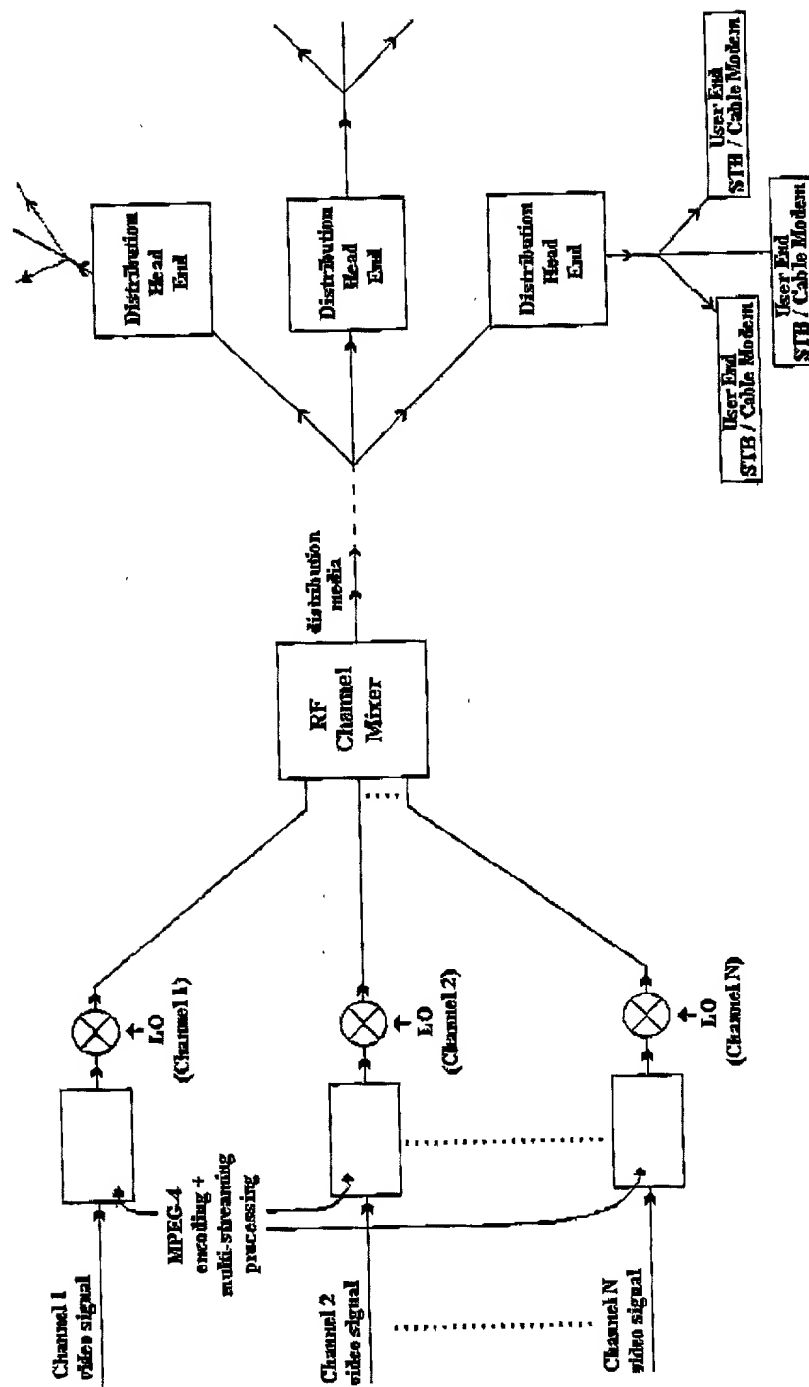


Figure 11

11/13

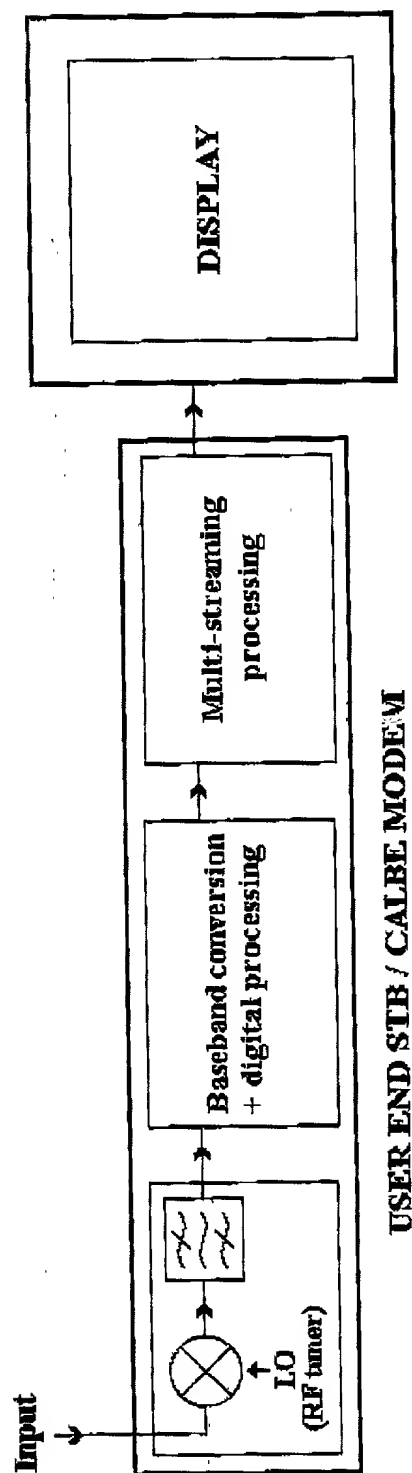


Figure 12

12/13

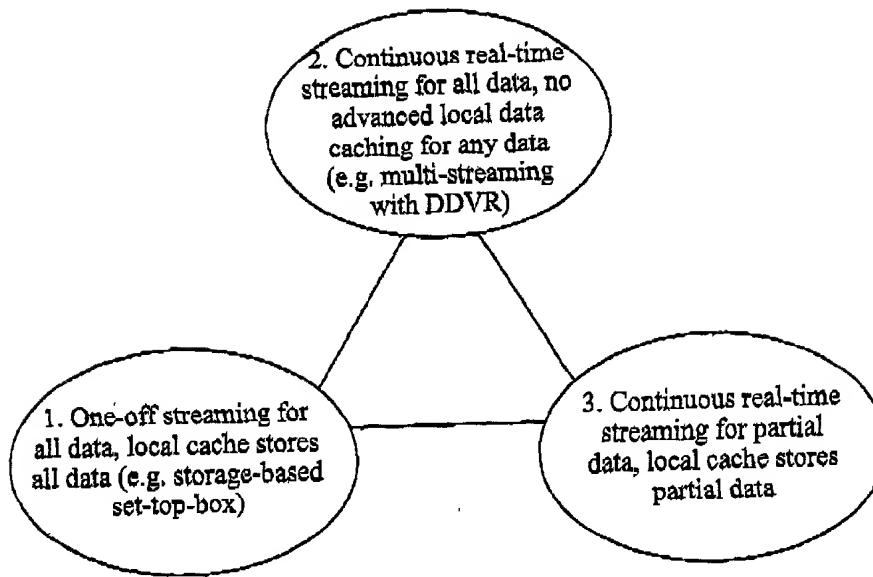


Figure 13